Whirlpool® WDE150LV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- 4.5 cu. ft. Oven
- Two 6" and Two 8" Coil Elements
- AccuBake® Temperature Management System
- EasyView™ Extra-Large Window
- Frameless Door

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Drop-In Electric Range Features & Specifications

Model No.	WDE150LV
Oven	
Temperature Management System	AccuBake®
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Automatic Light	Yes
Light Switch	Rocker
Adjustable Racks	2 Full-Width
EasyView™ Extra Large Window	Yes
Cooktop	
Porcelain-on-Steel SpillGuard™	Yes
Elements	(2) 6", (2) 8"
Drip Bowls	Chrome
Controls	
Controls	Electronic
Custom Broil	Yes
General Information	
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 9.7 kw 8.4 kw
Approx. Shipping Weight (lbs.)	160

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp
6" Backsplash Kits	
Stainless Steel	UXA9107AAS
Black	UXA9107AAB
White	UXA9107AAW
Biscuit	UXA9107AAQ
Filler Kits	
Stainless Steel	MK71FILLS
Black	MK71FILLB
White	FILL52 WHT
Biscuit	FILL52 BIS

Product Dimensions

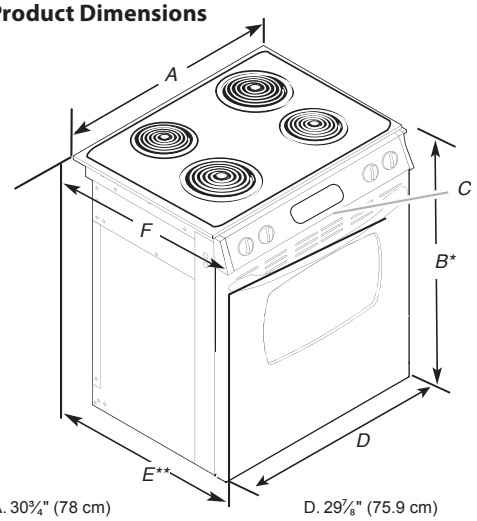

A. 30¾" (78 cm)
B. 27½" (69.9 cm) height to underside of cooktop edge with leveling legs screwed all the way in*
C. Model/serial number plate (located below the electronic control on oven frame)
D. 29⅞" (75.9 cm)
E. 28⁵⁄₁₆" (71.9 cm) from handle to standoff at back of range**
F. 23¾" (60.3 cm) countertop notch to rear of cooktop

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2½" (6.4 cm) beyond 24" (61.0 cm) base cabinet.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

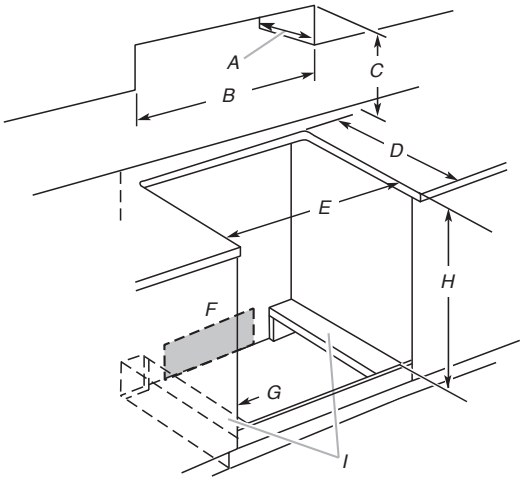

A. 13" (33 cm) upper cabinet depth
B. 30" (76.2 cm) min. opening width
C. For minimum clearance to the top of the cooktop, see NOTE.*
D. 23¼" (58.1 cm) opening depth
E. 30" (76.2 cm) min. opening width
F. Junction box - 5.5" (14 cm) min. from either cabinet, 8¼" (21 cm) max. from floor
G. Cabinet door or hinge should not extend into cutout.
H. 27½" (69.9 cm) top of countertop to support slats
I. 6" (15.2 cm) wide support slat on each side of cutout

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.